


Mar.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

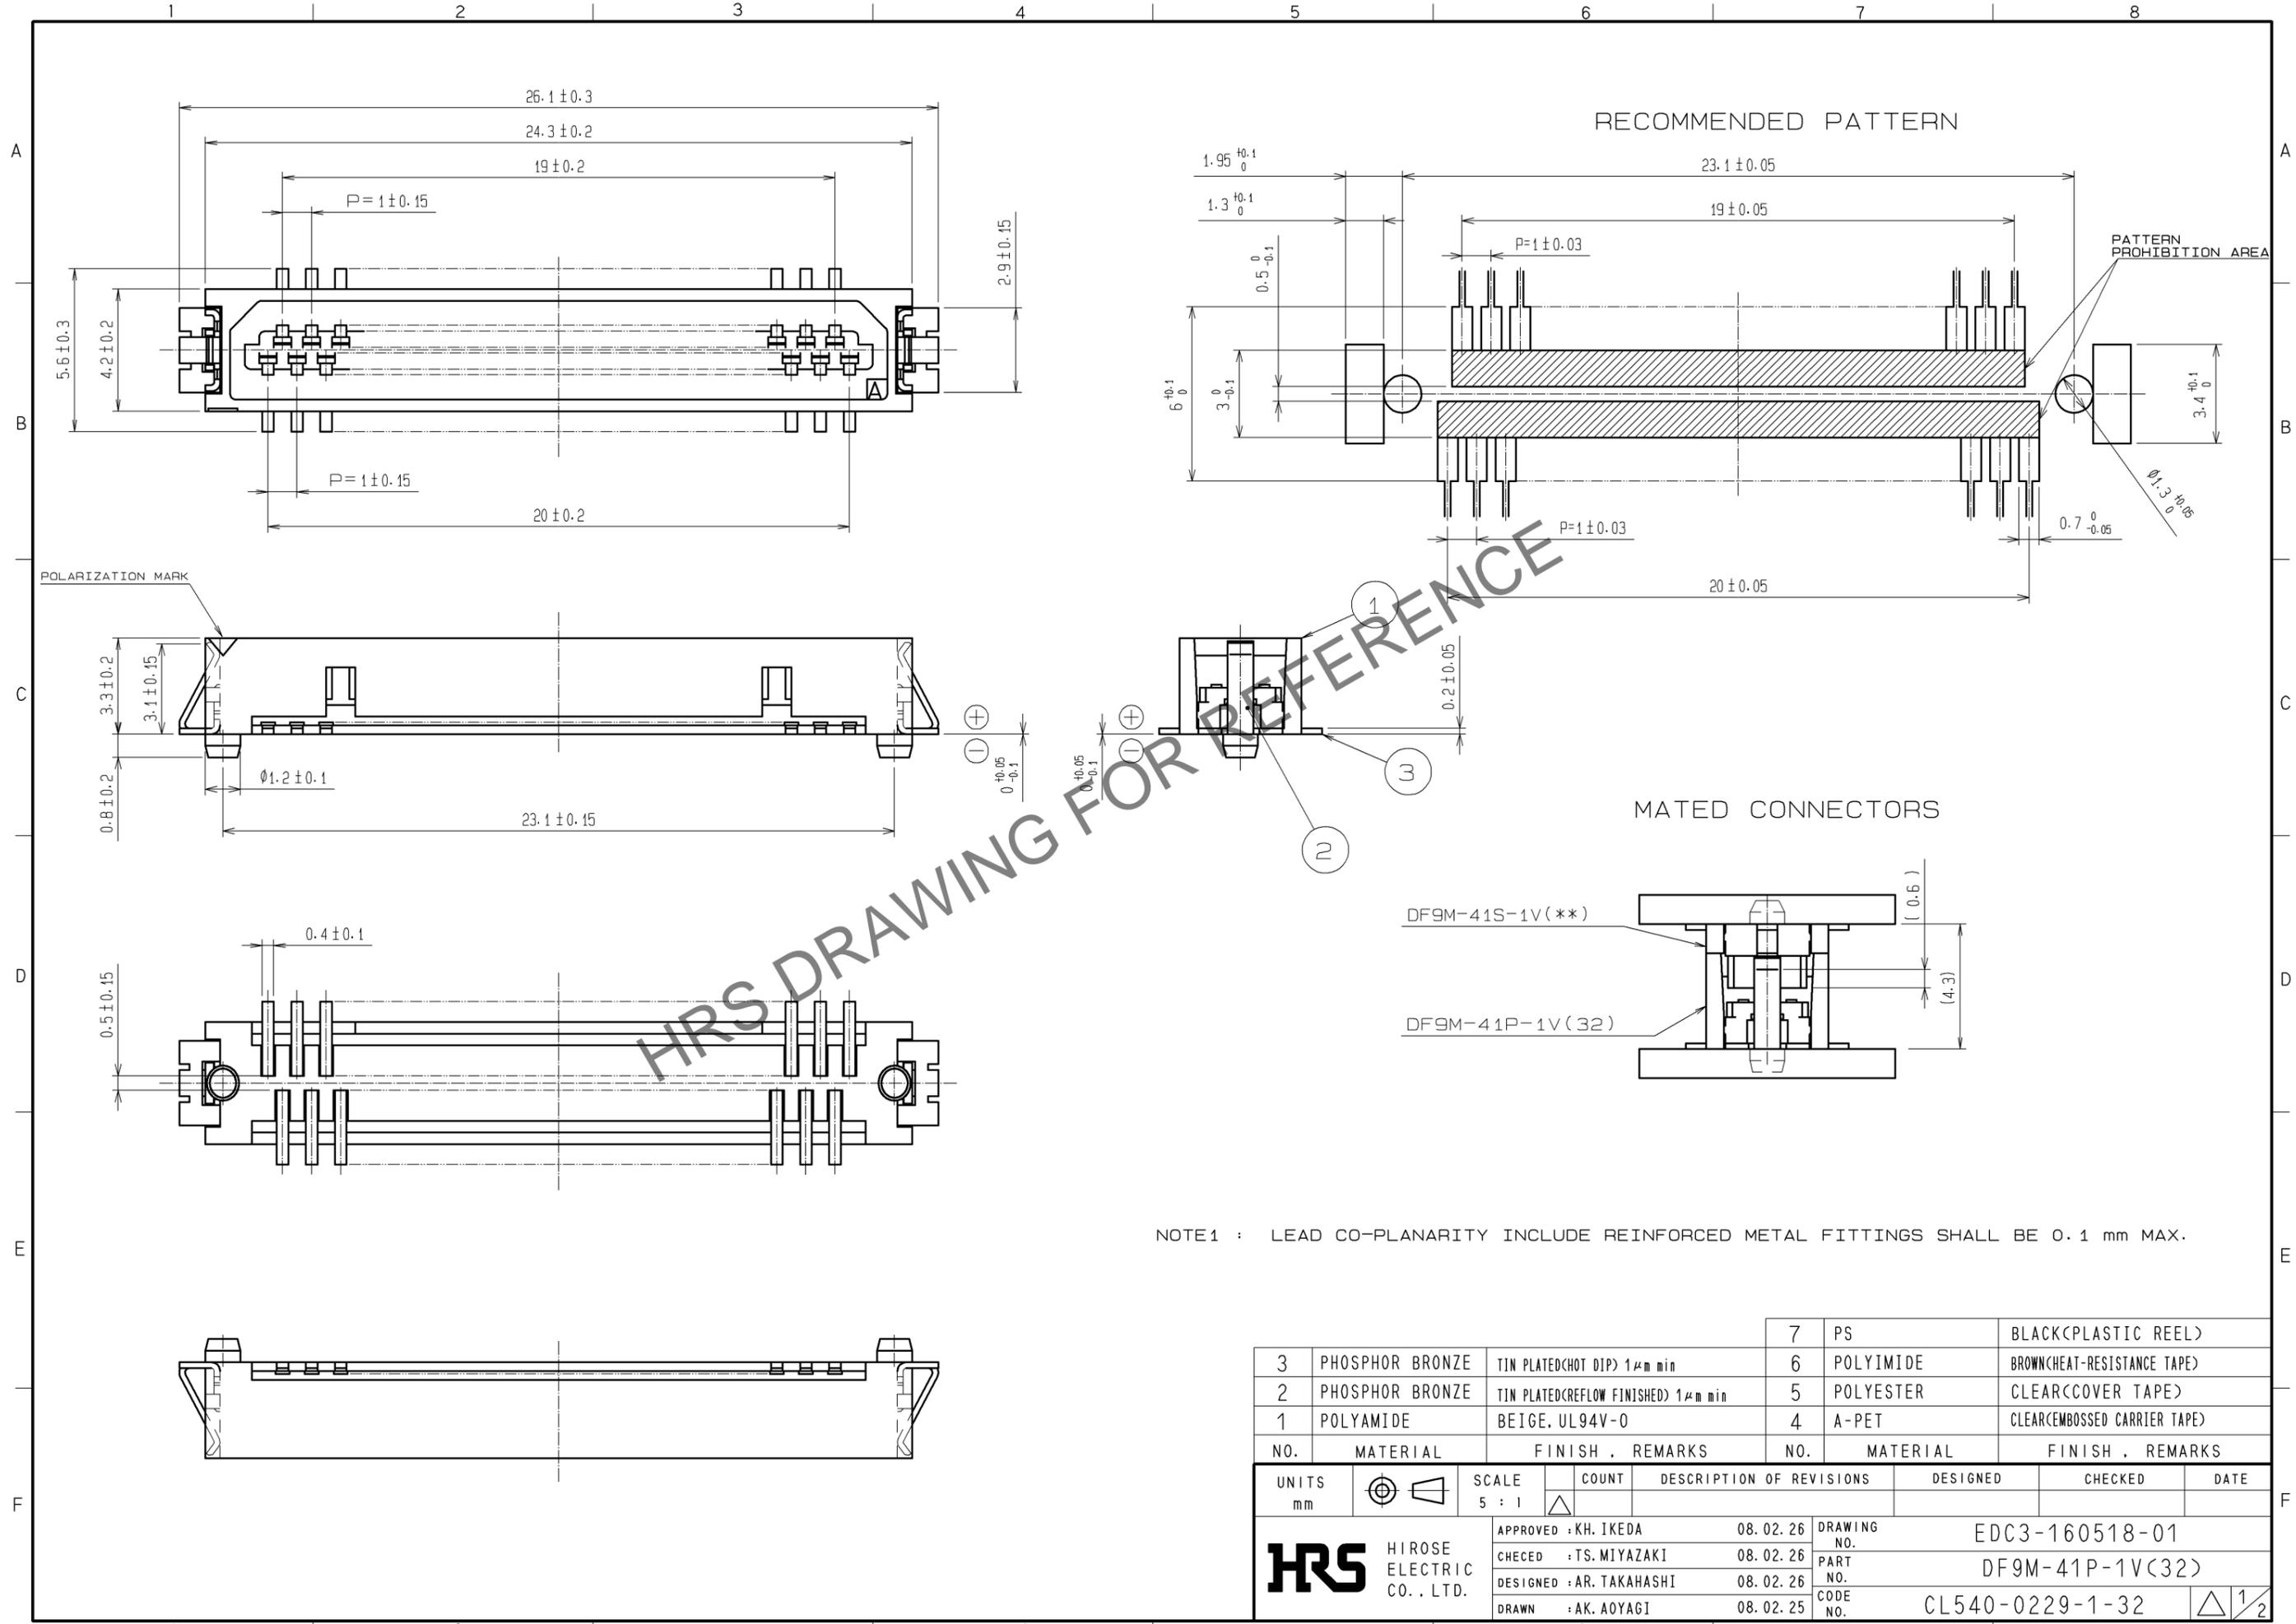


NOTE1 : LEAD CO-PLANARITY INCLUDE REINFORCED METAL FITTINGS SHALL BE 0.1 mm MAX.

3	PHOSPHOR BRONZE	TIN PLATED(HOT DIP) 1μm min	7	PS	BLACK(PLASTIC REEL)
2	PHOSPHOR BRONZE	TIN PLATED(REFLOW FINISHED) 1μm min	6	POLYIMIDE	BROWN(HEAT-RESISTANCE TAPE)
1	POLYAMIDE	BEIGE, UL94V-0	5	POLYESTER	CLEAR(COVER TAPE)
			4	A-PET	CLEAR(EMBOSSED CARRIER TAPE)
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

UNITS mm		SCALE 5 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
<b>HRS</b>	HIROSE ELECTRIC CO., LTD.	APPROVED : KH. IKEDA	08.02.26	DRAWING NO.	EDC3-160518-01		
		CHECKED : TS. MIYAZAKI	08.02.26	PART NO.	DF9M-41P-1V(32)		
		DESIGNED : AR. TAKAHASHI	08.02.26	CODE NO.	CL540-0229-1-32		
		DRAWN : AK. AOYAGI	08.02.25		1/2		


Mar.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

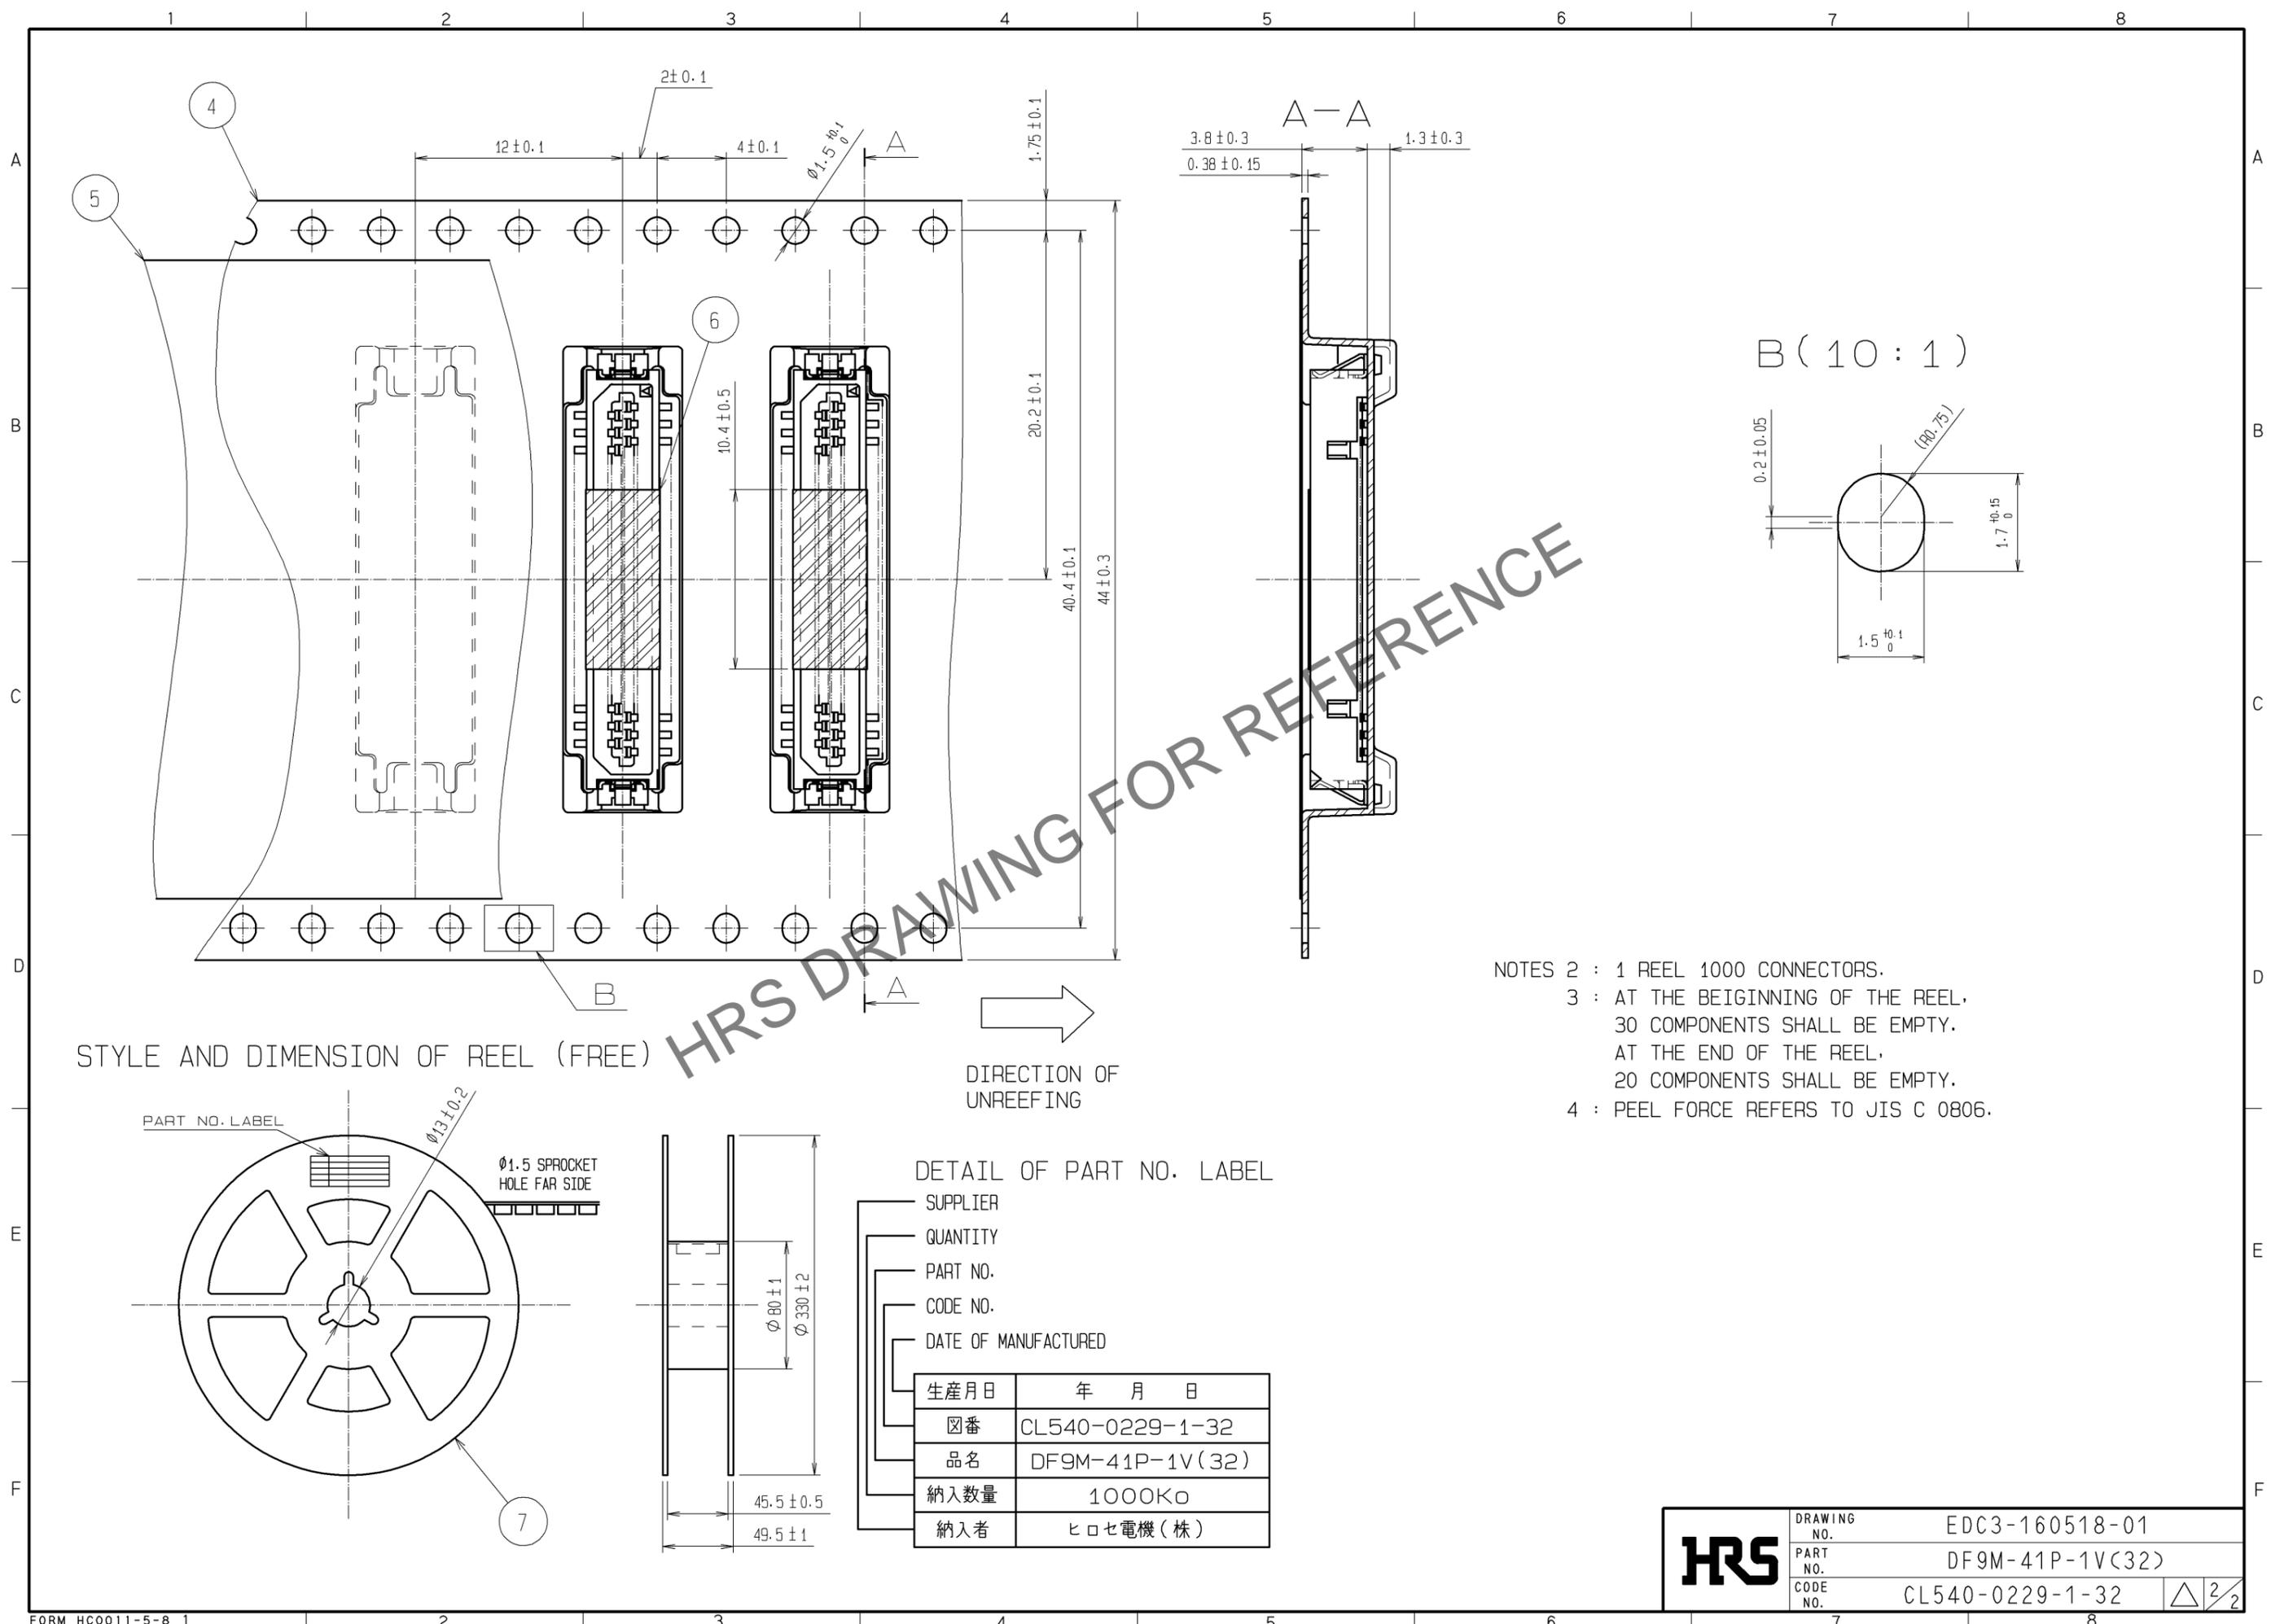

STYLE AND DIMENSION OF REEL (FREE)

DIRECTION OF UNREEFING

- NOTES 2 : 1 REEL 1000 CONNECTORS.  
 3 : AT THE BEGINNING OF THE REEL,  
 30 COMPONENTS SHALL BE EMPTY.  
 AT THE END OF THE REEL,  
 20 COMPONENTS SHALL BE EMPTY.  
 4 : PEEL FORCE REFERS TO JIS C 0806.

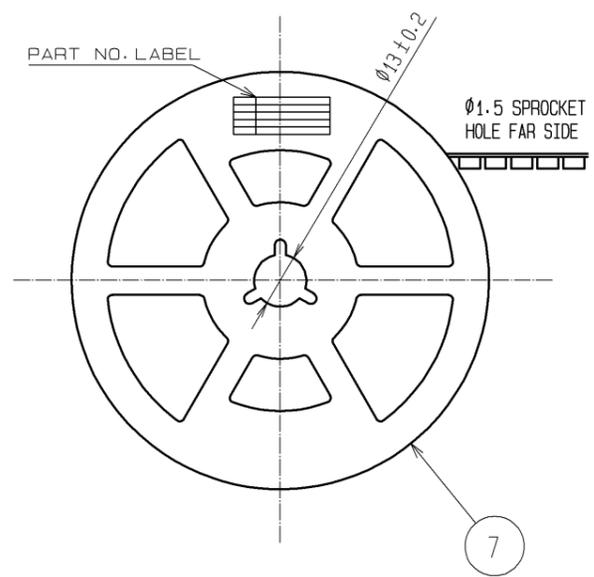

DETAIL OF PART NO. LABEL

SUPPLIER	
QUANTITY	
PART NO.	
CODE NO.	
DATE OF MANUFACTURED	
生産月日	年 月 日
図番	CL540-0229-1-32
品名	DF9M-41P-1V(32)
納入数量	1000K $\phi$
納入者	ヒロセ電機(株)

<b>HRS</b>	DRAWING NO.	EDC3-160518-01
	PART NO.	DF9M-41P-1V(32)
	CODE NO.	CL540-0229-1-32
		△ 2/2