

SAIL-M12WM12G-CD-10A**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



The most reliable way of achieving connections between two I/O slaves or between the control and one I/O subscriber is by way of pre-assembled cables. The line of cables covers PROFIBUS, CANopen, DeviceNet™, EtherCAT and Ethernet.

General ordering data

| | |
|------------|--|
| Version | Bus line, Connecting line, M12 / M12, Number of poles: 5, 10 m, pin, angled - bush straight, Shielded: Yes, LED: No, Sheath material: PUR, Halogen: No |
| Order No. | 1062101000 |
| Type | SAIL-M12WM12G-CD-10A |
| GTIN (EAN) | 4032248811861 |
| Qty. | 1 pc(s). |

Creation date June 12, 2025 12:43:49 PM CEST

Catalogue status 07.06.2025 / We reserve the right to make technical changes.

SAIL-M12WM12G-CD-10A

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Net weight 644 g

Technical specifications for cable

| | | | |
|--|----------------------|-----------------------------------|---|
| Acceleration | 5 m/s ² | Bending cycles | 3 Mio |
| Bending radius, min., moving | 10 x cable diameter | Bending radius, min., stationary | 5 x cable diameter |
| Cable length | 10 m | Colour coding | white, blue, red, black |
| Configurable cable length | No | Halogen | No |
| Hybrid cable | No | Insulation | TPE |
| Irradiation crosslinked | No | Number of poles | 5 |
| Outer cladding in accordance with UL AWM style | 20236 (80 °C / 30 V) | Outside diameter | 7 mm ± 0.3 mm |
| Resistant to welding beads | No | Sheath material | PUR |
| Sheathing colour | violet | Shielded | Yes |
| Speed | 180 m/s | Suitable for cable carriers | Yes |
| Temperature range, moving | -10...80 °C | Temperature range, stationary | -40...80 °C |
| Welding spark resistance | No | Wire cross section (Print/Online) | 2 x 0.34 mm ² + 2 x 0.22 mm ² |

General technical data

| | | | |
|------------------------|-----------------------------|------------------------------|-------------------|
| Coding | A-coded | Connection thread | M12 / M12 |
| Contact material | Ni/Au | Contact surface | Gold-plated |
| Housing main material | PUR | LED | No |
| Plugging cycles | ≥ 100 | Pollution severity | 3 |
| Protection degree | IP67 | Rated current | 4 A |
| Rated voltage | 125 V | Temperature range of housing | -25...+80 °C |
| Threaded ring material | Brass, nickel-plated | Tightening torque | M12: 0.8 - 1.2 Nm |
| Version | pin, angled - bush straight | jumpered | No |

Electrical properties

Rated voltage 125 V

General standards

Certificate no. (cULus) E307231

Plug, left

Plug left M12, A-coded, IP67, male contact, angled 90°, Plastic, shielded

Plug, right

Plug right M12, A-coded, IP67, female contact, straight, Plastic, shielded

SAIL-M12WM12G-CD-10A

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC002599 | ETIM 7.0 | EC002599 |
| ETIM 8.0 | EC002599 | ETIM 9.0 | EC002599 |
| ETIM 10.0 | EC002599 | ECLASS 9.0 | 27-06-03-08 |
| ECLASS 9.1 | 27-06-03-08 | ECLASS 10.0 | 27-06-03-08 |
| ECLASS 11.0 | 27-06-03-08 | ECLASS 12.0 | 27-06-03-08 |
| ECLASS 13.0 | 27-06-03-08 | ECLASS 14.0 | 27-06-03-08 |
| ECLASS 15.0 | 27-06-03-08 | | |

Environmental Product Compliance

| | |
|--------------------------------------|--------------------------------------|
| RoHS Compliance Status | Compliant with exemption |
| RoHS Exemption (if applicable/known) | 6c |
| REACH SVHC | Lead 7439-92-1 |
| SCIP | 1c533b66-fcff-4da5-b89f-fd55fbf5cb55 |

Approvals

Approvals



| | |
|-------------------------|---|
| Approvals MAMID | https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/ https://mdcop.weidmueller.com/mediadelivery/rendition/900_319228/-T1z1mm-S800/ |
| ROHS | Conform |
| UL File Number Search | UL Website |
| Certificate no. (cULus) | E307231 |

Downloads

| | |
|-----------------------------|--|
| Engineering Data | CAD data – STEP |
| Product Change Notification | 20221115 Technical change to CANopenDeviceNet cord sets and cables 20221115 Technische Änderung zu CANopenDeviceNet Leitungen |
| Catalogues | Catalogues in PDF-format |
| Brochures | FL FIELDWIRING EN |

Data sheet


SAIL-M12WM12G-CD-10A

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany


www.weidmueller.com

Drawings

Dimensioned drawing

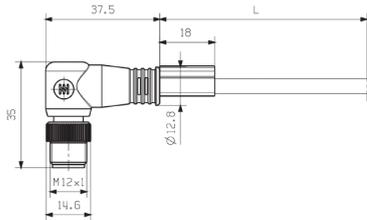


Male, angled

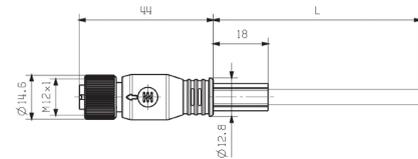


Straight socket


Pole scheme

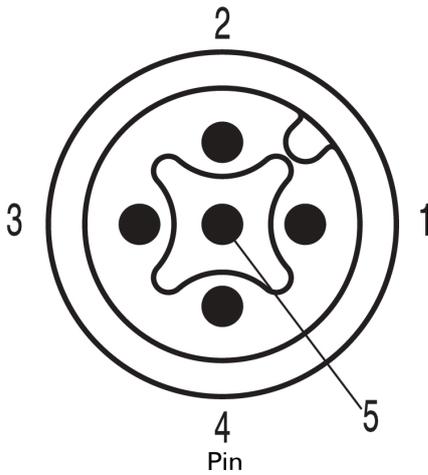

Pole scheme

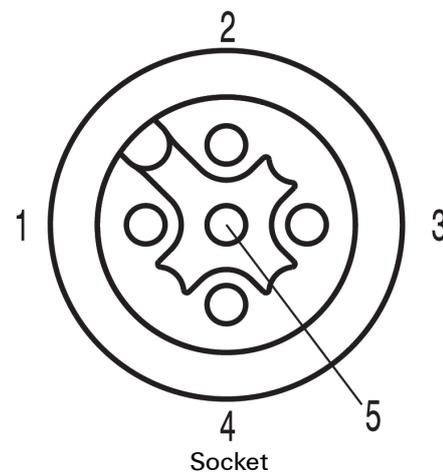

Wiring diagram

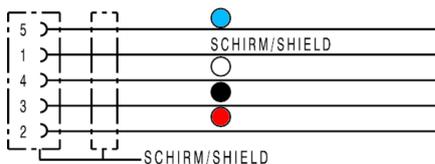

The ideal tool: Screwty® with torque function



Light, securely screwed-in round plug-in connectors. Screwty set DM / VPE: 1 / Order No.: 1920000000 Adapters: M12, M12 F, M8, M8 F