

**IE-C5DB4WE0100MCSXXX-E****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



Assembled IE cables, railway cable RW (reduced wire),  
Cat. 5, PUR, black, M12

**General ordering data**

Version	System cable, M12 D-code – IP 67 straight pin, Open, Cat.5 (ISO/IEC 11801), Radox GKW S, 10 m
Order No.	<a href="#">1269740100</a>
Type	IE-C5DB4WE0100MCSXXX-E
GTIN (EAN)	4050118060713
Qty.	1 pc(s).

Creation date June 14, 2025 7:17:45 PM CEST

Catalogue status 07.06.2025 / We reserve the right to make technical changes.

## IE-C5DB4WE0100MCSXXX-E

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

Length	10 m	Length (inches)	393.701 inch
Net weight	646 g		

## Temperatures

Storage temperature	-40 °C...90 °C	Operating temperature	-40 °C...90 °C
---------------------	----------------	-----------------------	----------------

## Cable specific standards

Corrosiveness of fumes	to IEC 60754-2	Fire protection in buses	According to ISO 6722-1 5.22 (UN ECE-R 118.01)
Fire safety for railway vehicles	According to DIN 5510-2 fire safety levels 1,2,3,4, According to BS 6853, According to EN50288-2-2, According to EN 45545, HL1 - HL3	Flames propagate vertically on bundled cables	According to BS4066-3, DIN EN 50266-2-5, According to IEC 60332-3-25 D
Fluorine content	According to EN 60684-2 Section 45.2	Hydrogen halide content	According to EN-50267-2-1, According to IEC 60754-1
Impervious to smoke	According to BS 6853 Appendix D, in accordance with EN 50268-2, According to IEC 61034-2	Multi-wire metallic data and control cable	According to EN50288-2-2
Poisonous gases	According to BS 6853 Appendix B		

## General standards

Connector standard	IEC 61076-2-101
--------------------	-----------------

## Standards

Connector standard	IEC 61076-2-101	Corrosiveness of fumes	to IEC 60754-2
Fire safety for railway vehicles	According to DIN 5510-2 fire safety levels 1,2,3,4, According to BS 6853, According to EN50288-2-2, According to EN 45545, HL1 - HL3	Flames propagate vertically on bundled cables	According to BS4066-3, DIN EN 50266-2-5, According to IEC 60332-3-25 D
Fluorine content	According to EN 60684-2 Section 45.2	Hydrogen halide content	According to EN-50267-2-1, According to IEC 60754-1
Impervious to smoke	According to BS 6853 Appendix D, in accordance with EN 50268-2, According to IEC 61034-2	Multi-wire metallic data and control cable	According to EN50288-2-2
Poisonous gases	According to BS 6853 Appendix B		

## Cable structure

Cross-section	2*2*AWG 22/7 - 2*2*0.36 mm <sup>2</sup>	Insulation cross-section	1.58 mm
Material sheath	Radox GKW S	Sheath diameter, max.	7 mm
Sheath diameter, min.	6.2 mm	Sheathing colour	black
Shielding	SF/UTP	Strands	7

Creation date June 14, 2025 7:17:45 PM CEST

Catalogue status 07.06.2025 / We reserve the right to make technical changes.

2

## IE-C5DB4WE0100MCSXXX-E

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com

## Technical data

### Electrical properties of cable

Category	Cat.5 (ISO/IEC 11801)
----------	-----------------------

### Mechanical and material properties of cable

Abrasion resistance	very good	Corrosiveness of fumes	to IEC 60754-2
Halogen	halogen-free, according to IEC 60754-2	Impervious to smoke	According to BS 6853 Appendix D, in accordance with EN 50268-2, According to IEC 61034-2
Min. bending radius, repetitive	6 * diameter	Resistance to oils	in accordance with EN 50306-3

### Plug, left

Plug left	M12, D-coded, IP67, male contact, straight, plug, Plastic, shielded
-----------	---

### Plug, right

Plug right	free conductor end
------------	--------------------

### Classifications

ETIM 6.0	EC002599	ETIM 7.0	EC002599
ETIM 8.0	EC002599	ETIM 9.0	EC002599
ETIM 10.0	EC002599	ECLASS 9.0	27-06-03-08
ECLASS 9.1	27-06-03-08	ECLASS 10.0	27-06-03-08
ECLASS 11.0	27-06-03-08	ECLASS 12.0	27-06-03-08
ECLASS 13.0	27-06-03-08	ECLASS 14.0	27-06-03-08
ECLASS 15.0	27-06-03-08		

### Environmental Product Compliance

RoHS Compliance Status	Compliant with exemption
RoHS Exemption (if applicable/known)	6c
REACH SVHC	Lead 7439-92-1
SCIP	67cf1078-beca-4687-860b-dc475a6ec24a

### Approvals

ROHS	Conform
------	---------

### Downloads

Engineering Data	<a href="#">CAD data – STEP</a>
User Documentation	<a href="#">MAN IE GUIDE DE</a> <a href="#">MAN IE GUIDE EN</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>
Brochures	<a href="#">FL FIELDWIRING EN</a> <a href="#">PI PROFINET CABLING EN</a> <a href="#">PI PROFINET CABLING EN</a>

**Data sheet**


**IE-C5DB4WE0100MCSXXX-E**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

[www.weidmueller.com](http://www.weidmueller.com)


**Drawings**

**Wiring diagram**

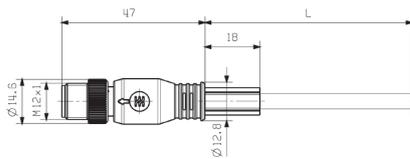

	M12
yellow	1
white	2
orange	3
blue	4

**Detailed drawing**



**IE-C5DB4WE0100MCSXXX-E**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

**Accessories**

**Tools**

Sheathing stripper for PVC cables



**General ordering data**

Type	AM 12	Version
Order No.	<a href="#">9030060000</a>	Tools, Sheathing strippers
GTIN (EAN)	4008190337827	
Qty.	1 pc(s).	

**Tools**

The CST with blue blade cartridge produces the best stripping results. The blue double-stage blade cartridge is particularly suited for Ethernet cables. It saves time and also ensures optimal stripping results.



**General ordering data**

Type	IE-CST	Version
Order No.	<a href="#">9204350000</a>	Tools, Sheathing strippers
GTIN (EAN)	4032248653072	
Qty.	1 pc(s).	

**IE-C5DB4WE0100MCSXXX-E**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

**Accessories**

**TM HF 18 mm**



The TM sleeves contain no halogens and virtually no pollutants. The sleeves are equipped with the TM-I 12 or TM-I 18 tags. They cover a wide range of applications for cables and lines. This system has particularly proved its worth in traffic engineering. The slim design guarantees firm seating on the conductor.

- Halogen-free
- The slim design guarantees firm seating on the conductor
- TMX 18 for mounting with cable-ties (width 3.6 mm)

**General ordering data**

Type	TM 4/18 HF/HB	Version
Order No.	<a href="#">1719850000</a>	TM, Socket x 11.4 mm, Polyethylene LD, Colour: Transparent,
GTIN (EAN)	4008190353209	Conductor O.D.: 6 - 10 mm
Qty.	500 pc(s).	

**TM HF 12 mm**



The TM sleeves contain no halogens and virtually no pollutants. The sleeves are equipped with the TM-I 12 or TM-I 18 tags. They cover a wide range of applications for cables and lines. This system has particularly proved its worth in traffic engineering. The slim design guarantees firm seating on the conductor.

- Halogen-free
- The slim design guarantees firm seating on the conductor
- TMX 18 for mounting with cable-ties (width 3.6 mm)

**General ordering data**

Type	TM 4/12 HF/HB	Version
Order No.	<a href="#">1719840000</a>	TM, Socket x 11.4 mm, Polyethylene LD, Colour: Transparent,
GTIN (EAN)	4008190353193	Conductor O.D.: 6 - 10 mm
Qty.	500 pc(s).	